

FEATURES

Used for cutting processes of Aluminum, PVC / Vinyl and Wood profiles.


- Hydro-Pneumatic cutting process
- Safe cutting with automatic saw cover
- Pneumatic vertical and horizontal clamps
- Cast core with impact resistance
- Cutting speed adjustment based on the profile
- Cutting at any desired angle between -45° and +45°
- Cutting at 0°, 15°, 22.5°, 30°, 45° right and left fixed angles

Standard Equipment

- Ø 16" (400mm) saw blade
- Cooling system

Optional Equipment

- Conveyor
- Single-phase system

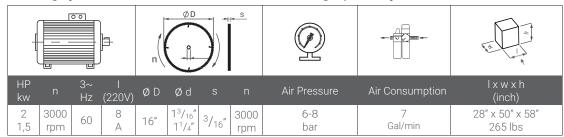

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.











Cutting Diagrams

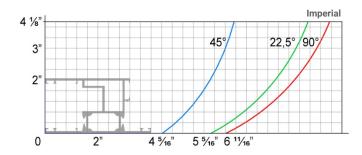

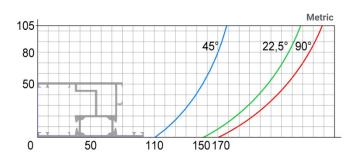

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.





