

GEMINI – V R

Double Head Cutting Machine Ø 550 mm - Automation with 3 Axis Servo Controlled




3 axis servo controlled double head cutting Machine with 550 mm saw blades GEMINI – V R is ideal for cutting aluminum and PVC profiles in various angles and thickness.


GEMINI – V R provides rapid and automatic positioning of heads with servo control at any angles between -22.5° and 45° .

Double head GEMINI – V R enables simultaneous cutting of profile lengths from 360 mm to 4930 mm and eliminates barriers for cutting of 4930 mm and longer profiles.

Safety is a topmost priority for GEMINI – V R together with the horizontal and vertical clamps along with profile support units which improve the cutting quality.

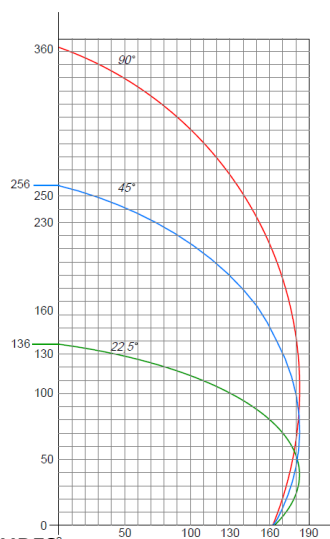

FEATURES

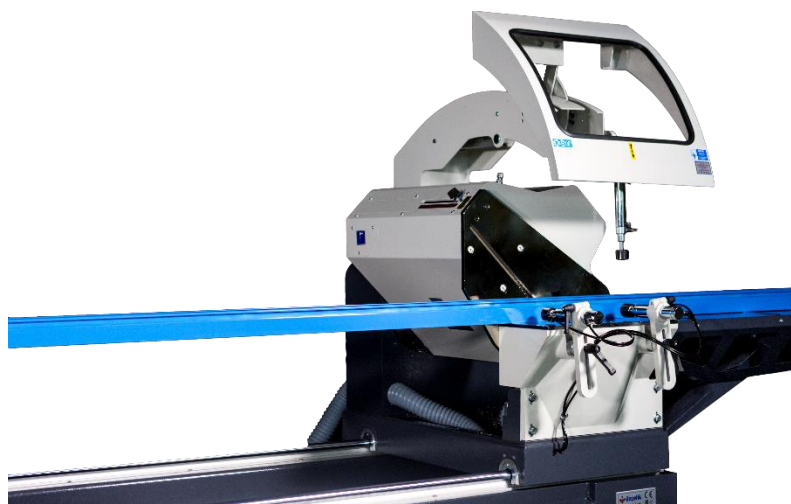

www.oz-machine.com

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.

GEMINI – V R

Double Head Cutting Machine Ø 550 mm - Automation with 3 Axis Servo Controlled



Servo controlled rotation axis of head	●
Rapid positioning of heads with servo control at any angles between	-22.5° and 45°
Hydro-pneumatic cutting feed adjustment	●
Minimum cutting length with double head (90°/45°)	360 / 590 mm
Maximum cutting length with double head (90°/45°)	4930 / 4930 mm
X axis positioning speed	35 m/min
Maximum internal rotation angle	45°
Maximum external rotation angle	-22.5°
Cemented carbide saw blade	2
Saw blade diameter	550 mm
Saw blade motor power	3 kW
Profile height measurement	○
Cutting zone protection covers	●
Horizontal pneumatic clamps	●
Vertical pneumatic clamps	●
Manual intermediate profile support	○
Automatic intermediate profile support	●
Intermediate profile support (pcs)	2
Roller conveyor on moving head	●
Roller conveyor on fixed head	●
Cooling lubrication system	●
Ability to control saw blade travel distance	●
Digital adjustment saw blade travel distance	○
Saw blade travel speed adjustment	●
Slicing mode at 90	●
Angle slicing mode at complimentary angles span	●
Barcode printer	○
Remote access	●
Data transfer via remote network connection, Ethernet and USB	●
Control panel	Industrial PC (IPC)
Industrial PC (IPC) Touchscreen HMI	●
Maximum profile loading length	8000 mm
Dust extractor	○

● Included

○ Optional



www.oz-machine.com

The product data, descriptions and illustrations are shown for advertising purpose in this document and Oz Machine, reserves the right to make modifications or improvements on data, descriptions and illustrations on this document without prior notice.